


# Zoom Feather


A very popular lightweight portable flag ideal for indoor or outdoor displays and events

## features & benefits

- Suitable for indoor or outdoor use
- Ideal for point of sale, retail display or exhibition environments
- 4700mm high plus base height
- The design allows the flag to rotate when the wind direction changes
- Quick assembly, flat packs for easy transportation, carry bag included
- Choice of bases to suit a range of applications and venues

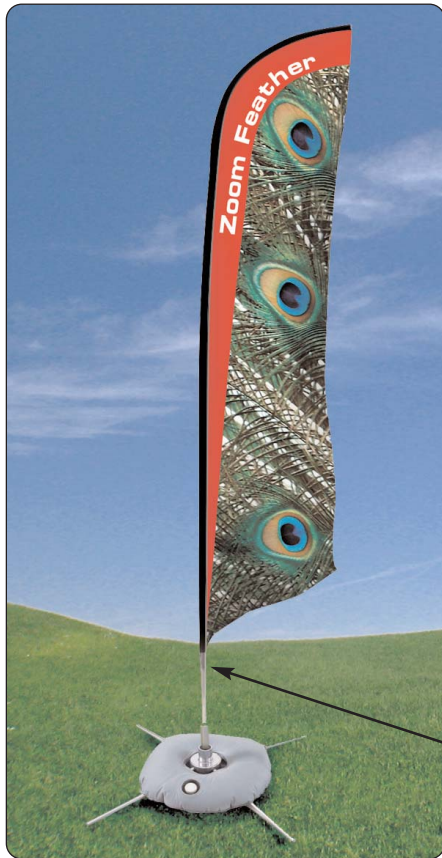

Weighting ring option



180mm fixing loop sewn to base of flag



Base foot




Weighting ring



Ground stake



Drive-on Car foot

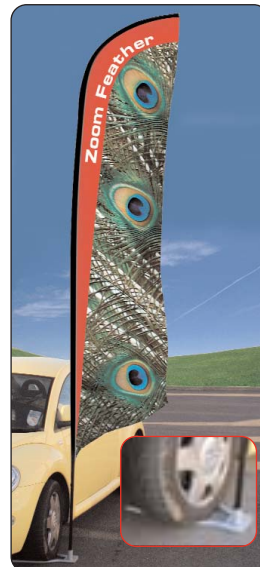

Drive-on Car foot option



Ground stake option

## hardware specifications

Assembled dimensions:  
(base foot & weighting ring option)  
4700mm (h) x 870mm (w)  
(varies depending on graphic tension)

Base foot dimensions: 560mm x 560mm approx  
Weight: 0.5kg approx

Weighting ring dimensions: 470mm dia approx  
Weight: 0.15kg approx empty  
Weight: 6kg approx when filled with water  
Capacity: 6 litres of water approx

Ground stake dimensions:  
800mm x 120mm approx  
Weight: 1.5kg approx

Drive-on car foot dimensions:  
565mm x 330mm approx  
Weight: 1.8kg approx

## graphic specifications

Recommended substrate:  
Lightweight flag textile

Recommended print process:  
Dye-sublimation print onto one side of the flag only

Visual size & graphic dimensions:  
Refer to template:  
**zoom\_feather\_rev1**

A full length pocket should be sewn into the left hand edge of the flag together with a fixing loop (see above), please refer to the template.

**Note: The graphic template is an initial guideline only and may need dimensional adjustment dependant upon specific flag substrates used.**

## additional information

Zoom Feather flags are designed to withstand approximate windspeeds of 13 to 18 miles per hour (Beaufort Scale 4)

Supplied bag dimensions:  
1480 (l) x 90mm (dia)

Supporting poles and Base foot are supplied with carry bags. Ground Stake and Drive on-foot are not supplied with carry bags.

# Assembly Instructions

## Supporting pole/flag assembly



1 Assemble the bungee corded poles together.



2 Insert the middle sized GRP rod into the bungeed poles.




3 Feed the pole assembly (thinnest end first) into the flag pocket. **Warning: take care not to damage the pocket when inserting the rods/poles.** Bend the GRP rod to allow the flag to take shape.



4 Attach the looped fabric end of the flag to the pole clasp.



5 Insert the pole into the base adapter for use with base options.

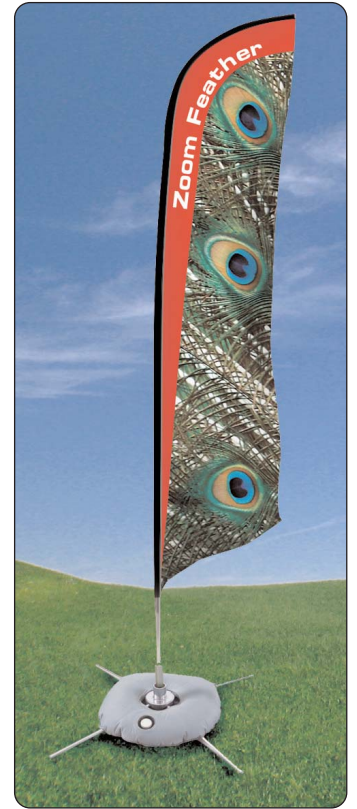

## Base foot and weighting ring option



1 Open out the base foot.



2 Place the base foot on the ground.



3 Fill the weighting ring with water and place over the base foot. **Warning: Do not drop the weighting ring.**




4 Fit the supporting pole/flag assembly into the base foot.

## Ground stake option



1 Push the the ground stake firmly into the ground.



2 Insert the supporting pole/flag assembly into the ground stake.

## Drive-on car foot option



1 Drive vehicle onto the car-foot .



2 Insert the supporting pole/flag assembly into the car-foot